

# GET PUMPED ABOUT SELF-LEVELING WITH SCHÖNOX AND GRACO.



©2020\_HPS\_GRACO PUMP\_SELL SHEET\_20-779



## MAXIMIZE YOUR WORKFLOW WITH SCHÖNOX SELF-LEVELERS AND GRACO TOUGHTEK® MP SERIES MIXING PUMPS

Designed with the installer in mind, Graco ToughTek® MP Series mixing pumps help you get the subfloor installed faster. Applying self-leveling underlayments in large areas can be a logistical nightmare. Cover big square footage in small turnaround times. Mix and pump Schönox self-leveling compounds continuously and consistently, resulting in smooth and seamless floors. Simply set the water flow rate, add material to the hopper, get to work, and get **ÖN IT.**

Take your business to a whole new level. Call 855.391.2649 or visit [hpsubfloors.com](http://hpsubfloors.com) to learn how your projects run smoother with Schönox Ön It.





# GRACO TOUGHTEK® MP-SERIES MIXING PUMPS

FOR WATER-BASED CEMENTITIOUS AND SYNTHETIC GYPSUM MATERIALS

Ideal for Schönox self-leveling underlayments and toppings such as Schönox US, XM, ZM, and AP Rapid. Get your jobs done faster with Graco and Schönox ÖN IT.



PUMPABLE SELF-LEVELERS



WATER BASED MATERIALS



INCREASED SPEED



INTERIOR & EXTERIOR

## SPECIFICATIONS

- Compact and easy to maneuver
- Easy to operate
- 300 PSI pumping pressure
- Rugged hopper with bag breaker
- Holds six 50 lb. bags
- MP40 capable of pumping 200 bags/hr.
- Designed for large projects requiring 500+ bags
- Cleaner and more efficient
- Reduced labor
- Consistent distribution of materials
- Requires consistent water source
- Requires 3-phase 230 volt, 30 amp power source or minimum of 20kW generator

## ADVANTAGES OF PUMPING

Graco ToughTek® MP Series mixing pumps, like the MP40, mix and pump across long distances or heights, making it easier to complete work in less time and with fewer installers. In self-leveling applications, Graco pumps allow workers to move much faster, possibly doubling production with the same size crew. Jobs can often be completed in a single day versus multiple days, increasing speed of renovation and construction alike. Utilizing MP Series mixing pumps also decreases labor needs, such as mixing and hauling of buckets or mixers. Installers can split the workload, and divide duties while monitoring all aspects of the job, from water pressure to flow rate. Maximize your efficiency and manage your workforce, working faster and working smarter.

## SELF-LEVELING UNDERLAYMENTS

Using Graco ToughTek® MP Series mixing pumps to install Schönox self-leveling underlayments only magnifies the many benefits of these compounds. Pumping reduces installation times, and allow installers to take full advantage of rapid-setting compounds such as Schönox ZM Rapid. The MP40 can consistently pump material distances of up to 200 feet and heights of up to 60 feet, all from a single location. This allows increased efficiency when covering large areas, multiple rooms, and levels. Maintaining a wet edge creates more consistency in structural properties and in appearance. A strong, level, and smooth subfloor is essential for successful floor covering installations.




1. Prepare existing substrate as needed using Schönox repair, patching and smoothing products and Schönox primers and moisture mitigation.



2. Prepare pump for installation, following instructions in provided manual. Connect water source and electrical hook up. Begin testing prior to installation.



3. Test the flow rate of the self-leveling compound using the provided Schönox Pumping Technology technical data sheet.

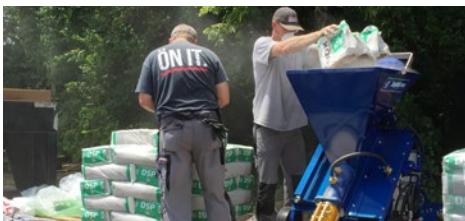

4. Once flow rate is correct, begin installation, continuously loading Schönox underlayment in hopper while ensuring water flow is uninterrupted.



5. Pump Schönox self-leveling compound to desired thickness.



6. Use applicable tools when necessary to ensure proper coverage and finish.

Take your business to a whole new level. Call 855.391.2649 or visit [hpsubfloors.com](http://hpsubfloors.com) to learn how your projects run smoother with Schönox ÖN It.

