

SCHÖNOX HPS 1100


INSTALLING VINYL COMPOSITION TILE? THE CHOICE IS CLEAR.



CLEAR THIN SPREAD ACRYLIC ADHESIVE

Schönnox HPS 1100 is designed for the bonding of vinyl composition tile on porous and non-porous substrates in interiors areas. HPS 1100 is solvent-free and offers an extended work time and yet a quick dry time. Ready for foot traffic immediately and heavy traffic after just 2 hours.

©2020, HPS, HPS 1100, SELL SHEET 20-774

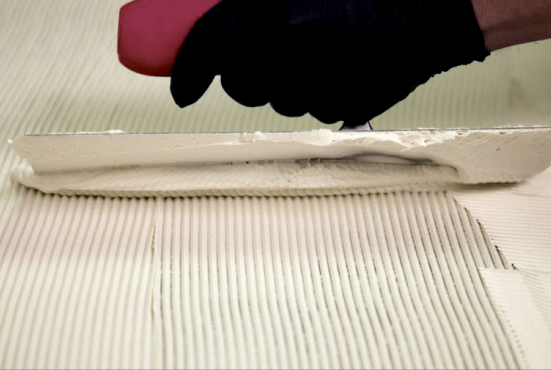

SCHÖNOX HPS 1100

CLEAR THIN SPREAD ACRYLIC ADHESIVE

Designed for the bonding of vinyl composition tile on porous and non-porous substrates in interiors areas. Up to 90 RH/11pH.



CASTOR WHEEL LOADING



TROWELABLE



INTERIOR WALL & FLOOR



RADIANT HEAT

PRODUCT CHARACTERISTICS

- Solvent-free
- Faster cure time, loading in 24 hrs.
- MVER - up to 8lbs/90% RH
- Easy to apply
- Low odor
- VOC compliant
- High strength
- High coverage
- For interior use only

RECOMMENDED APPLICATION DETAILS

Schönox HPS 1100 is suitable for installing: Vinyl composition tile on suitable, cement and gypsum based substrates, approved plywood, terrazzo, radiant-heat subfloors, and properly prepared VCT and sheet vinyl, in interior areas

PACKAGING

- 4 gallons in plastic container

STORAGE

- Store in cool, dry conditions.
- Shelf life: 1 year unopened
- Containers that have been opened should be closed immediately.
- Remove any skin that has formed; do not stir in.

TECHNICAL DATA

- Base: acrylic polymer
- Color: light straw
- Storage temperature: 40° – 95°F
- Working temperature: 65° – 95°F
- Open time: up to 16 hours
- Drying time: approx. 30 – 60 minutes
- Immediate foot traffic, heavy traffic after 2 hours
- Final strength (prior to maintenance routine): 24 hours
- Coverage per 4 gal. unit when applied with notched trowel 1/16" x 1/16" x 1/16": 125-175 sq.ft. per gal., 1/32" x 1/16" x 1/32": 200-300 sq.ft. per gal.

All values are approximate and are subject to local climatic fluctuations based upon conditions at 70°F with atmosphere of less than 65% relative humidity following the recommended mixing ratio. Do not install underlayment or topping before the substrate has dried thoroughly.

DISPOSAL

Empty containers and dispose of in accordance with federal, state and local waste disposal regulations.

VOC CONTENT

<11 grams/liter. Meets Rule 1168

PRECAUTIONS

- Follow the product data sheets or the Schönox supplementary products mentioned and used.
- If in doubt, please obtain further manufacturer's information or test in a small area. Avoid eye and skin contact. Close container after each use. Do not reuse container. Do not flush adhesive down drains, sewers or waterways. KEEP OUT OF REACH OF CHILDREN. Carefully read and follow all cautions and warnings on product label. For complete safety information, please refer to the Safety Data Sheet, or visit our website, hpsubfloors.com.



LEED V4

May help contribute to LEED v4 certification of projects in these categories:

- EQ 4:1 – X points Low-Emitting Material Adhesives & Sealants
- EQ 4:3 – X points Low-Emitting Materials Carpet Systems