

AFTER THE WATERS RECEDE, RISE UP WITH SCHÖNOX ÖN IT.




©2020_HPS_POST FLOOD_SELL SHEET_20-781

HOW FAST CAN YOU RECOVER AND RENOVATE AFTER FLOOD DAMAGE AND GET PROTECTION UP TO 100% RH?

Floodwaters inflict what can be viewed as irreparable damage to the very foundation of residential and commercial properties. Schönox offers solutions that accomplish fast-track installation and longevity, therefore enabling the recovery and full renovation of floors in flooded structures. With moisture mitigation systems, smoothing and patching compounds, self-levelers, and adhesives, Schönox will help you rise above the waters.

Take your business to a whole new level. Call 855.391.2649 or visit hpsubfloors.com to learn how your projects run smoother with Schönox Ön It.



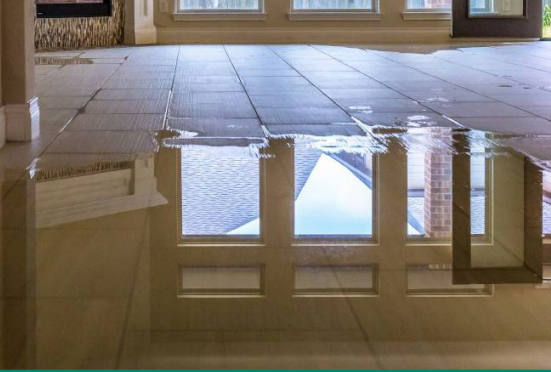

SCHÖNOX WATER DAMAGE SOLUTIONS

RECOVER AND RENOVATE WHILE PROTECTING FROM FUTURE STORMS

Schönox provides solutions to subfloor challenges with primers and moisture mitigation systems, repair, patching and smoothing products, floor-leveling compounds, adhesives, and waterproofing materials.

SCHÖNOX SL

MOISTURE-RESISTANT, RAPID-DRYING, CEMENT-BASED, SMOOTHING AND PATCHING COMPOUND

- Very smooth finish
- Interior use only
- Exceptional hardness and strength
- May be applied from a featheredge up to 1"
- Ready for foot traffic after: approx. 20 minutes
- Ready for covering: after approx. 20 minutes when applied as a true featheredge
- Coverage: approx. 200 sq.ft. when applied as a true featheredge

Suitable for patching, smoothing and leveling of:

- Concrete and cement substrates
- Floor leveling compounds
- Old substrates such as ceramic tiles
- Old, water-resistant adhesive residues
- Wooden substrates
- Gypsum substrates

SCHÖNOX ZM

MOISTURE-RESISTANT, DUST-REDUCED, CEMENT-BASED, SELF-LEVELING COMPOUND

- Designed for fast leveling, filling, and smoothing of interior floors
- Interior use only
- Ready for foot traffic: approx. 2 hours
- Ready for covering:
 - after approx. 16 hours at 1/4"
 - after approx. 48 hours at 3/8"
- Coverage per unit: approx. 60 – 70 sq.ft. at 1/8"
- 5800 PSI after 28 days

Suitable for leveling over:

- Flexible coverings
- Wood floor, layer thickness above 1/8"
- Ceramic tiles
- Concrete and cement substrates
- Gypsum substrates
- OSB board, plywood
- Old substrates, such as ceramic tiles and terrazzo
- Old, water-resistant adhesive residues

SCHÖNOX EPA RAPID

TWO-PART, FAST-DRYING, EPOXY-BASED, MOISTURE MITIGATION SYSTEM AND MIGRATION BARRIER

- Solvent-free
- Low viscosity
- Complies with SCAQMD 1113
- Waterproof
- High-penetrating
- Interior and exterior use
- Ready for leveling after approx. 2 – 3 hours
- Only one coat required
- Maximum coverage rate approx. 300 sq.ft. per unit

Suitable on porous, unheated concrete slabs to reduce moisture vapor emission rates from 100% RH or 25 lbs./1000 sq.ft.24 hrs

May help contribute to LEED v4 certification of projects in these categories:

- EQc2 – 3 points Low-Emitting Materials
- Environmental Product Declaration (EPD) Declaration number: EPD-DIV-2013311-EN

SCHÖNOX PROTECT

UNIVERSAL ADHESIVE FOR RESILIENT FLOORING

- Interior and exterior use
- Solvent-free
- Water-free
- Non-shrinking, even in thick layers
- Suitable on underfloor heating systems
- Heavy-duty
- Low-odor
- Easy to apply
- High-strength

- pH irrelevant
- Coverage per unit when applied with
 - notched trowel 1/16" x 1/16" x 1/16": approx. 400 - 550 sq.ft.;
 - notched trowel 1/8" x 1/8" x 1/16": approx. 270 – 400 sq.ft.
- Waiting time on substrates:
 - porous: 0 – 10 minutes
 - non-porous: approx. 20 minutes
- Open time: approx. 30 minutes
- Drying time: approx. 24 hours
- Final strength: after approx. 48 – 72 hours

- Ideal for heavy load areas and critical physical and climatic environments
 - One-part SMP (silane modified polymer)
- Suitable for installing:
- Sheet vinyl
 - Vinyl composition tile
 - Luxury vinyl tile
 - Synthetic rubber coverings in sheets
 - Linoleum coverings in sheets
 - Rubber and cork granulated underlayments
 - Artificial turf