

SCHÖNOX iFIX™ EXCEPTIONAL SOLUTIONS, FAST.




WATERTIGHT SHOWER ASSEMBLY

Our Schönox iFix™ Waterproof Sealing Adhesive offers a 40% faster installation time over traditional methods, with exceptional coverage and bond strength. Schönox iFix™ can be bundled with our Schönox AB and ST waterproofing materials to produce a comprehensive shower assembly system that's ideal for commercial or residential use.

Take your business to a whole new level. Call 855.391.2649 or visit hpsubfloors.com to learn how your projects run smoother with Schönox On It.



 **SCHÖNOX**[®]
HPS NORTH AMERICA

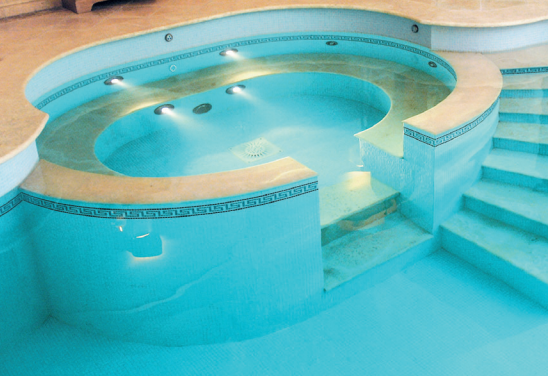

SCHÖNOX iFix™

COMPLETE THE JOB FASTER WITH THIS UNIQUE SYSTEM SOLUTION

Contains every component needed to construct a maintenance-free, watertight shower assembly. Suitable for swimming pools, balconies and terraces in interior and exterior applications.



DUST REDUCED



INTERIOR OR EXTERIOR



WATERTIGHT



GEV-EMICODE

INSTALLATION

Break all-time installation speed records with Schönox iFix™. Using this unique and innovative 2-in-1 system, you can seal the membrane and the seams at the same time. iFix™ is efficient and easy to apply with a roller, saving 40% of your working time. This application method also reduces material used, therefore saving you money.

APPLICATION

The Schönox iFix™ system is compatible with all brands of pre-manufactured shower pans or can be used in conjunction with Schönox US for a poured pan. Either way, you are guaranteed to make quick and efficient work of constructing maintenance-free, watertight shower assemblies.

PACKAGING

- Combi pail:
- 7.7 lbs/3.5 kg net.wt. in paper bag (powder component)
- 1.1 gal/4.8 kg net.wt. in plastic container (liquid component)

TECHNICAL DATA

- Color: powder component - grey dispersion - blue
- Pot life: approx. 45 min at +70°F / 21°C
- Application temperature: not below 41°F / 5°C
- Ready for covering:
- after approx. 1 hour on porous substrate
- after approx. 12 hour on non-porous substrates
- Coverage: approx. 105 sq.ft. per set



iFix™



ST Sealing Tape



ST IC-Interior Corners




ST D8 Pipe Cover
4.73" x 4.73" w / 5/16" diameter hole

SYSTEM COMPONENTS INCLUDE:

- ST Tape
- AB
- IC-Interior Corners
- EA-Exterior Corners
- ST D8 Pipe Covers
- ST D15 Pipe Covers
- ST FC Sleeve




Sealing, Waterproofing Sheet Membrane



ST EA-Exterior Corners



ST FC Sleeve
16.75" x 16.75"



1. Schönox iFix™ is used on both walls and floors along with Schönox AB using a larger roller.



2. iFix™ is used to adhere the Schönox ST accessories using the 4" roller.



3. The AB layer is overlapped at the seams and adhered using Schönox iFix™.



4. A straightedge is used to press out any air pockets.



5. Tiles can be installed right away, speeding the installation process tremendously.

Take your business to a whole new level. Call 855.391.2649 or visit hpsubfloors.com to learn how your projects run smoother with Schönox On It.



SCHÖNOX
HPS NORTH AMERICA