
I Adhesive Recommendation Amtico I



		Substrate Preparation		
Substrates (for example)	Gypsum based substrates	tes Concrete / Cement based substrates Prefabricated boards (OSB, particle board)		
Primer (for example)	SCHÖNOX KH FIX (EC1 PLUS) SCHÖNOX VD (EC1 PLUS)			
Self Leveling Compound (for example)	SCHÖNOX AP (EC1 PLUS) SCHÖNOX ZM (EC1 PLUS R) SCHÖNOX US (EC1 PLUS R)			
		Floor Covering Installation		
Quality	Amtico			
Loading		Normal up to increased load (commercial areas) classes 21-23 / 31-34 / 41-42		
Recommended Adhesive	Universal Pressure Sens	OX EMICLASSIC [™] itive Acrylic Adhesive for all Flexible ings (EC1 PLUS)	SCHÖNOX PU 900 2-Component Universal Polyurethane Adhesive (EC 1 PLUS R)	
Tool	Notched trov	/el 1/16" x 1/16" x 1/16"	Notched trowel 1/8" x 1/8" x 1/16"	
Coverage	approx. 500 - 700 sq. ft. per unit of 3.35 gal.		approx. 105 sq. ft. per unit of 1.09 gal.	
		ets, the advices of the manufactures of floor covering and also detailed information, product data sheets or laying instructions	so according to the well-known guidlines and instructions. If in doubt please do son s are available under www.schonox.com or www.amtico.de	

Vinyl design coverings Karndean I

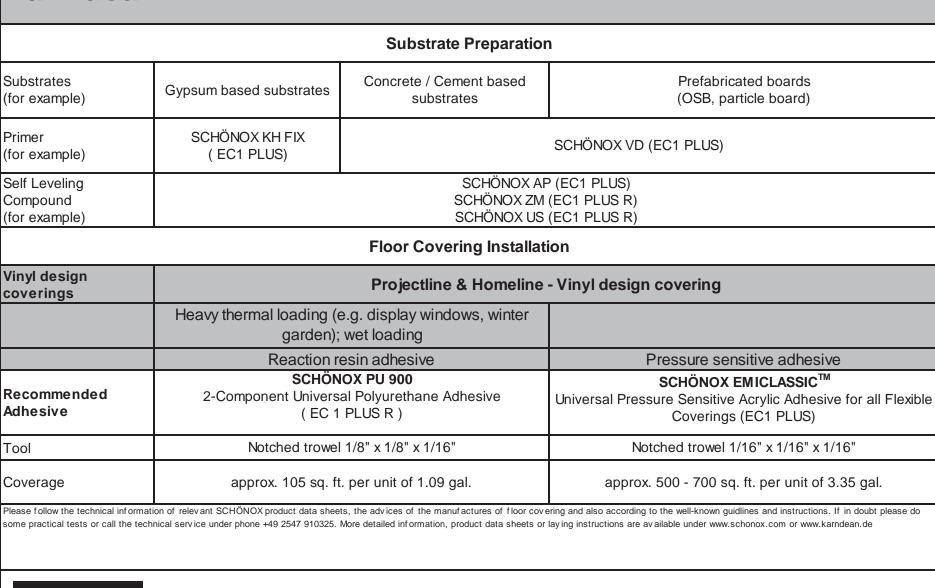

SCHÖNOX

HPS NORTH AMERICA

KARNDEAN

I Adhesive Recommendation Mondo I



		Substrate Preparation		
Substrates (for example)	Gypsum based substrates	Prefabricated boards (OSB, particle board)		
Primer (for example)	SCHÖNOX KH FIX (EC1 PLUS)	(SCHÖNOX VD (EC1 PLUS)		
Self Leveling Compound (for example)	SCHÖNOX AP (EC1 PLUS) SCHÖNOX ZM (EC1 PLUS R) SCHÖNOX US (EC1 PLUS R)			
		Floor Covering Installation	1	
1				
	GEODE, PUNTI	& (DL), UNITO, TONO, FUTURA & (DL), ALB	A, BOLLO, STEP, MURALE, ARDESSIA, SAFTY, LOGE	S
quality	thickness: < 3,2 mm_dispe	ersion adhesive possible (ask in case of i action-adhesive (dispersion adhesive or	ncreased thermal or physical load	S
quality Recommended Adhesive	thickness: < 3,2 mm dispe >3,2 - 4,0 mm re > 4,0 mm reactions SCH	ersion adhesive possible (ask in case of i action-adhesive (dispersion adhesive or	ncreased thermal or physical load	S (EC 1
Recommended Adhesive	thickness: < 3,2 mm disper >3,2 - 4,0 mm re > 4,0 mm reaction SCH Universal Pressure Sensitive Acr	ersion adhesive possible (ask in case of i action-adhesive (dispersion adhesive or on-adhesive	ncreased thermal or physical load hly on demand) SCHÖNOX PU 900* 2-Component Universal Polyurethane Adhesive	
	thickness: < 3,2 mm disper- >3,2 - 4,0 mm re > 4,0 mm reaction SCH Universal Pressure Sensitive Acr Notched	ersion adhesive possible (ask in case of i action-adhesive (dispersion adhesive or on-adhesive IÖNOX EMICLASSIC [™] ylic Adhesive for all Flexible Coverings (EC1 PLUS)	ncreased thermal or physical load hly on demand) SCHÖNOX PU 900* 2-Component Universal Polyurethane Adhesive PLUS R)	
Recommended Adhesive Tool Coverage Please follow the technical information of rele	thickness: < 3,2 mm disper- >3,2 - 4,0 mm re > 4,0 mm reaction SCH Universal Pressure Sensitive Acr Notched approx. 500 -	ersion adhesive possible (ask in case of i action-adhesive (dispersion adhesive or on-adhesive IONOX EMICLASSIC [™] ylic Adhesive for all Flexible Coverings (EC1 PLUS) trowel 1/16" x 1/16" x 1/16" - 700 sq. ft. per unit of 3.35 gal.	ncreased thermal or physical load hly on demand) SCHÖNOX PU 900* 2-Component Universal Polyurethane Adhesive PLUS R) Notched trowel 1/8" x 1/8" x 1/16"	(EC 1



Homogeneous coverings

Tarkett I

		Substrate	Preparation		
Substrates (for example)	Gypsum based substrates	ased substrates	Prefabricated boards (OSB, particle board)		
Primer (for example)	SCHÖNOX KH FIX (EC1 PLUS) SCHÖNOX VD (EC1 PLUS)				
Self Leveling Compound (for example)	SCHÖNOX AP (EC1 PLUS) SCHÖNOX ZM (EC1 PLUS R) SCHÖNOX US (EC1 PLUS R)				
		Floor Coveri	ng Installation		
Homogeneous coverings	Megalit, Stone, Emin	ent, Optima, Granit	, Eclipse, Somj	olan Plus, Standar	d, Marleyflor Plus, Marleyflex
Recommended Adhesive	SCHÖNOX EMICLASSIC [™] Universal Pressure Sensitive Acrylic Adhesive for all Flexible Coverings (EC1 PLUS)		Multipurpose A	OX UNITECH Adhesive for carpet, nd linoleum	SCHÖNOX PU 900 2-Component Universal Polyurethane Adhesive (EC 1 PLUS R)
Tool	Notched trowel 1/16" x 1/16" x 1/16"		Notched trowel	1/16" x 1/16" x 1/16"	Notched trowel 1/8" x 1/8" x 1/16"
Coverage	approx. 500 - 700 sq. ft. per unit of 3.35 gal.		approx. 630 so	q. ft. per unit of 3.77 gal.	approx. 105 sq. ft. per unit of 1.09 ga
	ation of relevant SCHÖNOX product data she I service under phone +49 2547 910325. More		•	*	guidlines and instructions. If in doubt please do some onox.com or www.tarkett.com

Luxury Vi

Tarkett

Self Leveling Compound

Substrates (for example)

(for example)

Floor covering

Recommended

Loading

Adhesive

Coverage

Tool

Primer (for example)

re Recommend nyl Tile	lation			BECHONOX HPS North America
	Substra	te Preparation		
Gypsum based substrates	Concrete / Cement b	ased substrates		fabricated boards B, particle board)
SCHÖNOX KH FIX (EC1 PLUS)			SCHÖNOX VD (EC1 PLUS)	
		SCHÖNOX AP SCHÖNOX ZM (I SCHÖNOX US (I	EC1 PLUS R)	
	Floor Cov	ering Installatio	n	
	iD Essential 30, iD	Selection 40, iD	Inspiration 70, iD Inspira	ation 55
	Residential / Co	ommercial		Heavy Loadings (e.g. display windows, conservatory, wet rooms)
SCHÖNOX ROLL A Rollable Acrylic Adhesive fo			OX EMICLASSIC [™] re Sensitive Acrylic Adhesive	SCHÖNOX PU 900 2-Component Universal Polyurethane

for all Flexible Coverings (EC1 PLUS)

Notched trowel 1/16" x 1/16" x 1/16"

approx. 500 - 700 sq. ft. per unit of 3.35 gal.

Adhesive

(EC1PLUSR)

Notched trowel 1/8" x 1/8" x 1/16"

approx. 105 sq. ft. per unit of 1.09 gal.

The requirements of the relevant valid standards, guidelines and data sheets apply. Do not install underlayment or topping before the substrate has dried thoroughly. Follow the technical product information of the floor coverings manufacturers regarding specific substrate requirements for their coverings. If in doubt we recommend to test in a small area.

(EC 1)

SCHÖNOX ROLL AND GO ROLLER

approx. 540 sq. ft. per Set

(containing adhesive, primer and the required tools)



Vinyl design deals



Tarkett I

		Substrate Preparation		
Substrates (for example)	Gypsum based substrates	ypsum based substrates Concrete / Cement based substrates (OSB, particle boards (OSB, particle board)		
Primer (for example)	SCHÖNOX KH FIX (EC1 PLUS)	SCHONOX VD (EC1 PLUS)		
Self Leveling Compound (for example)	SCHÖNOX AP (EC1 PLUS) SCHÖNOX ZM (EC1 PLUS R) SCHÖNOX US (EC1 PLUS R)			
		Floor Covering Installation		
Vinyl design deals	I.D. Moduline, Esteem, Reflections, Premier			
loading	increased thermal influence (e.g. display windows, winter garden); wet loading			
	reaction resin adhesive		pressure sensitive adhesion* + wet-bonding	
	SCHÖNOX PU 900 2-Component Universal Polyurethane Adhesive (EC 1 PLUS R)			
Recommended Adhesive	2-Component Univ	versal Polyurethane Adhesive	SCHÖNOX EMICLASSIC [™] Universal Pressure Sensitive Acrylic Adhesive for all Flexible Coverings (EC1 PLUS)	
	2-Component Univ (E	versal Polyurethane Adhesive	Universal Pressure Sensitive Acrylic Adhesive for all Flexible	

910325. More detailed information, product data sheets or laying instructions are available under www.schonox.com or www.tarkett.com

* Pressure to sensitive ahesion allows the covering a higher size alternation / dimensional change.

