


SCHÖNOX iFIX™ EXCEPTIONAL SOLUTIONS, FAST.



ROLLABLE WATERPROOF SEALING ADHESIVE

Our Schönox iFIX™ Waterproof Sealing Adhesive offers a 40% faster installation time over traditional methods, with exceptional coverage and bond strength. Schönox iFIX™ can be combined with our Schönox AB and ST waterproofing materials to produce a comprehensive shower assembly system that's ideal for commercial or residential use.

© 2025, SELL SHEET "iFIX_A_SIKA_BRAND_2496"

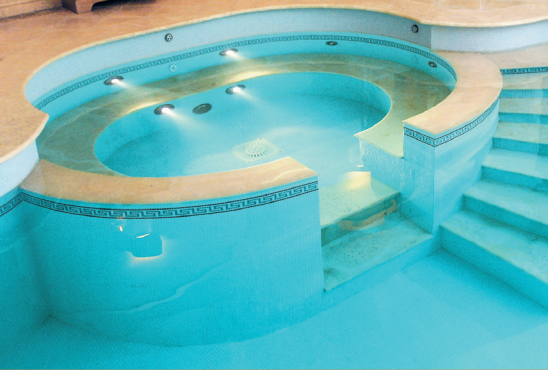

SCHÖNOX iFIX™

COMPLETE THE JOB FASTER WITH THIS UNIQUE SYSTEM SOLUTION

Schönox offers every component needed to construct a maintenance-free, watertight shower assembly. Suitable for swimming pools, balconies and terraces in interior and exterior applications. Combine Schönox iFIX™ with the Schönox waterproofing accessories shown below.



DUST REDUCED



INTERIOR OR EXTERIOR



WATERTIGHT



GEV-EMICODE

INSTALLATION

Break all-time installation speed records with Schönox iFIX™. Using this unique and innovative 2-in-1 system, you can seal the membrane and the seams at the same time. iFIX™ is efficient and easy to apply with a roller, saving 40% of your working time. This application method also reduces material used, therefore saving you money.

APPLICATION

The Schönox iFIX™ and Schönox waterproofing accessories are compatible with all brands of pre-manufactured shower pans or can be used in conjunction with Schönox US for a poured pan. Either way, you are guaranteed to make quick and efficient work of constructing maintenance-free, watertight shower assemblies.

PACKAGING

- Combi pail:
 - 7.7 lbs/3.5 kg net.wt. in paper bag (powder component)
 - 1.61 gal/7.0 kg net.wt. in plastic container (liquid component)

TECHNICAL DATA

- Color: powder component - grey dispersion - blue
- Pot life: approx. 45 min. at +70°F / 21°C
- Application temperature: not below 41°F / 5°C
- Ready for covering:
 - after approx. 1 hour on porous substrate
 - after approx. 12 hour on non-porous substrates
- Coverage: approx. 105 sq.ft.



LEED V4.1 ID+C, BD+C

Contributes to LEED v4.1 certification of projects in these categories:

- EQc2 – 3 points Low-Emitting Materials
- MRc1 – up to 2 points Life-Cycle Impact Reduction
- MRc2 – 1 point Environmental Product Declaration
- MRc4 – 1 point Material Ingredient

WATERPROOFING ACCESSORIES:



iFIX™




ST Sealing Tape



ST IC-Interior Corners



ST EA-Exterior Corners



Sealing, Waterproofing Sheet Membrane




ST D8 Pipe Cover
4.73" x 4.73"w / 5/16" hole diameter



ST D15 Pipe Cover
4.73" x 4.73"w / 5/8" hole diameter



ST FC Sleeve
16.75" x 16.75"



1. Schönox iFIX™ is used on both walls and floors along with Schönox AB using a larger roller.



2. iFIX™ is used to adhere the Schönox ST accessories using the 4" roller.



3. The AB layer is overlapped at the seams and adhered using Schönox iFIX™.



4. A straightedge is used to press out any air pockets.



5. Tiles can be installed right away, speeding the installation process tremendously.

Refer to Technical Data Sheets for additional, current information. Available on the Schönox app and at hpsubfloors.com.

Take your business to a whole new level.
Call 855.391.2649 or visit hpsubfloors.com to learn how your projects run smoother with Schönox On It.



BUILDING TRUST

